


Vacuum switch**0151**

- User adjustable
- 1/4" push-on terminals
- 200 to 1,000 mbar range
- 20 bar over-pressure
- Brass body
- N/O or N/C contacts
- 1/8" BSP female thread
- Optional protective boots

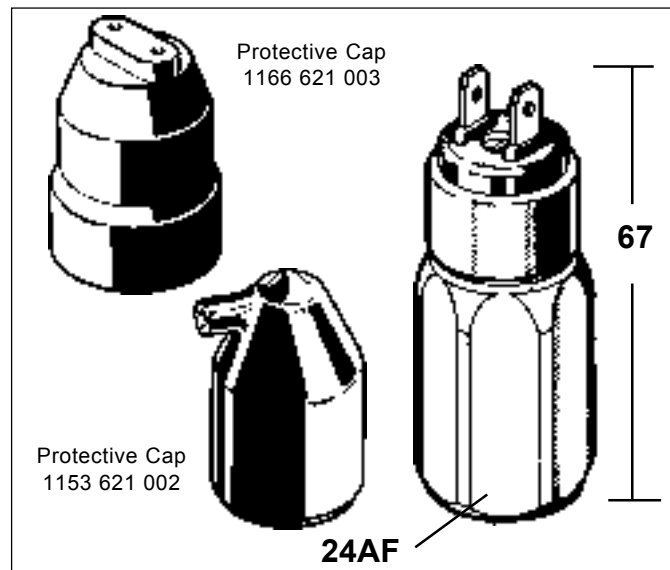

Switch electrical rating	42V max/100VA	Maximum operations	200/minute
Protection	(IP65) Terminals IP00	Mechanical life	1,000,000 operations
Temperature range ¹	-20°C to +120°C	Body material	Brass

Diaphragm material	3 - FKM - (Viton)	Trichlorethylene, hydraulic fluid i.e. (HFA, HFB, HFC, HFD) air.
--------------------	-------------------	--

Normally Open Contacts	Normally Closed Contacts	Thread Type	Adjustment range - mbar	Tolerance in mbar	Max pressure
0151 454 15 3 001	0151 455 15 3 001	1/8" BSP	200 - 1,000 mbar	± 100 mbar	20 bar

See also DataFax 1043 for alternative model

PRESSURE-VACUUM-LEVEL LTD

Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,
Crowborough, East Sussex, TN6 2NQ U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

See the Cat at: www.pvl.co.uk

