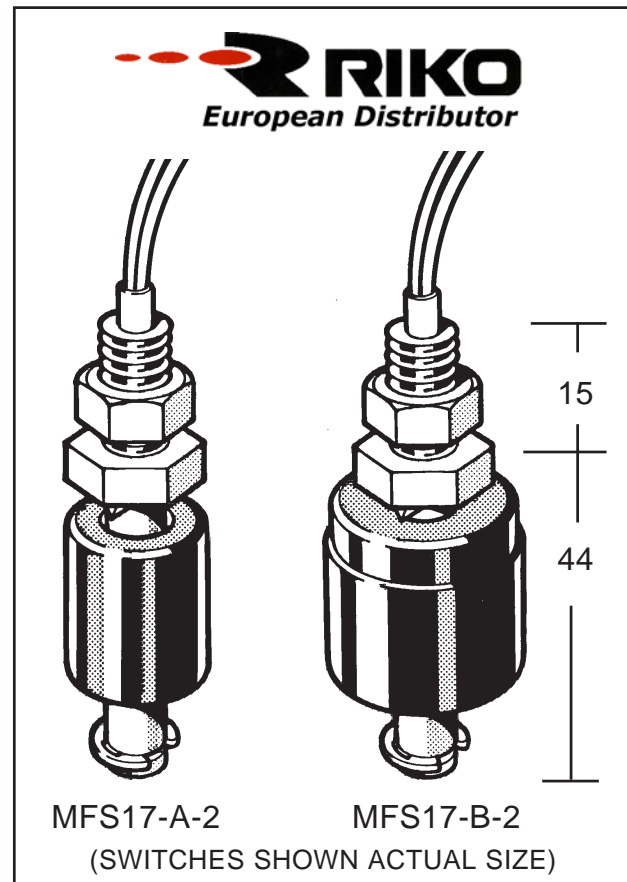


**Level switch - Nitrile****MFS17-A & B****FEATURES**

- Nitrile float - unsinkable!
- Stainless steel circlip
- Polyacetal stem
- MFS17-A-2 = Close on fall contact
- MFS17-B-2 = N/O or N/C contact
- Maximum temperature 80°C
- 30cm flying leads

**OPTIONS**

- P/P float - see DataFax 1504
- S/S stem - see DataFax 1511
- Multi-level - see DataFax 1526

**REED SWITCH PROTECTION**

When a reed-switch is used on an inductive load e.g. a relay - the current surge which flows back to the reed-switch (back EMF) can cause the reed switch to fail. Fitting a suppressor either "in-line" or "across" the relay coil can help protect the reed-switch.

**REVERSIBLE FLOAT (MFS17-B-2 only)**

To change from a N/O to a N/C contact, remove the circlip and reverse the float on the stem.

**PRICES**

See our latest prices at [www.epvl.co.uk](http://www.epvl.co.uk)

Maximum voltage	240Vac	Float material	Nitrile (foamed NBR)
Reed switch rating	66VA	Stem material	Polyacetal
Maximum current	0.5A (resistive)	A-2 Float details	20dia x 20 SG = 0.73
Maximum fluid pressure	15 bar	B-2 Float details	26dia x 25 SG = 0.47
Thread	1/8" BSP x 15mm long	Circlip material	S/Steel (P/P optional)

**PRESSURE-VACUUM-LEVEL LTD**

Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,  
Crowborough, East Sussex, TN6 2NQ U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

Web: [www.pvl.co.uk](http://www.pvl.co.uk) Email: [info@pvl.co.uk](mailto:info@pvl.co.uk)

