

**Level switch - side entry****MFS21-E & K****FEATURES**

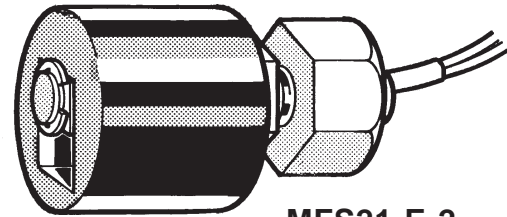
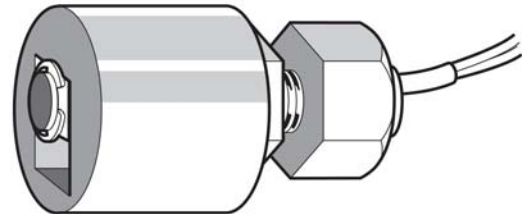
- Nitrile float (MFS21-E-2)
- Polypropylene float (MFS21-K-2)
- Stainless steel circlip (P/P optional)
- Polyacetal stem
- N/O or N/C contact
- 1/4" BDS thread with nut
- 30cm flying leads

**OPTIONS**

- Polypropylene circlip
- All S/Steel - see Datafax 1516



**RIKO**  
European Distributor

**MFS21-E-2****MFS21-K-2****REED SWITCH PROTECTION**

When a reed-switch is used on an inductive load e.g. a relay - the current surge which flows back to the reed-switch (back EMF) can cause the reed switch to fail.

Fitting a suppressor either "in-line" or "across" the relay coil can help protect the reed-switch.

**PRICES**

See our latest prices at [www.epvl.co.uk](http://www.epvl.co.uk)

Maximum voltage	240Vac	Float material	Polypropylene or Nitrile
Reed switch rating	66VA	Stem material	Polyacetal
Maximum current	0.5A	E-2 Float details	31dia x 25 SG = 0.62
Maximum pressure & temp	15 bar	K-2 Float details	31dia x 25 SG = 0.80
Thread	1/4" BSP x 22mm	Circlip material	S/Steel (P/P optional)

**PRESSURE-VACUUM-LEVEL LTD**

Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,  
Crowborough, East Sussex, TN6 2NQ U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

Web: [www.pvl.co.uk](http://www.pvl.co.uk) Email: [info@pvl.co.uk](mailto:info@pvl.co.uk)



**PVL**  
*Switched on to Industry*