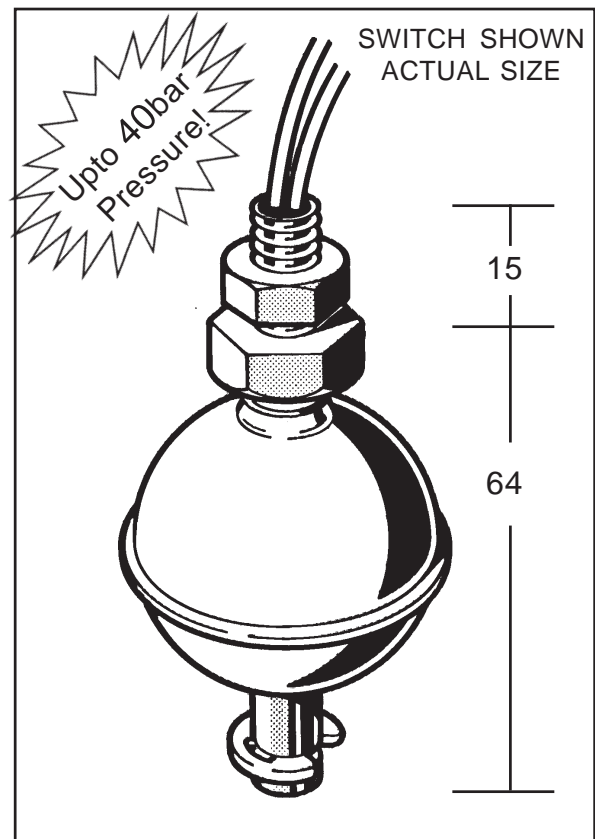


**Level switch****RFS-8-2****FEATURES**

- All 316 grade stainless steel
- Pressures upto 40 bar
- 120°C maximum temperature
- N/O or N/C contact
- 1/8" BSP Thread with nut
- 220Vac/50VA

**OPTIONS**

- Side entry - See DataFax 1515
- Multi-level - See DataFax 1526

**REVERSIBLE FLOAT**

To change from a N/O to a N/C contact, simply remove the circlip and reverse the float on the stem.

**REED SWITCH PROTECTION**

When a reed-switch is used on an inductive load e.g. a relay - the current surge which flows back to the reed-switch (back EMF) can cause the reed switch to fail.

Fitting a suppressor either "in-line" or "across" the relay coil can help protect the reed-switch.

**PRICES**

See our latest prices at [www.epvl.co.uk](http://www.epvl.co.uk)

Maximum voltage	240Vac	Float material	316 stainless steel
Reed switch rating	50VA	Stem material	316 stainless steel
Maximum current	0.5A (resistive)	Float dimensions	43mm diameter
Maximum pressure & temp	40 bar & 120°C	Float buoyancy	0.55 SG
Thread	1/8" BSP x 15mm L	Circlip material	316 stainless steel

**PRESSURE-VACUUM-LEVEL LTD**

Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,  
Crowborough, East Sussex, TN6 2EG U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

See the Cat at: [www.pvl.co.uk](http://www.pvl.co.uk)

