


Level switch**A95****FEATURES**

- Double sealed float switch
- Polypropylene outer casing
- Adjustable counter-weight
- Differential level control
- Heavy duty microswitch
- Ideal for water and sewage
- Suitable for acidic & alkaline liquids

OPTIONS


- 3,5,10,15,20 & 25m cable lengths
- S/Steel version - DataFax 1524
- 3/Phase switching - DataFax 1521
- Intrinsically Safe (IS) option with EA30 Galvanic Barrier - (EEXi) - please phone for details.

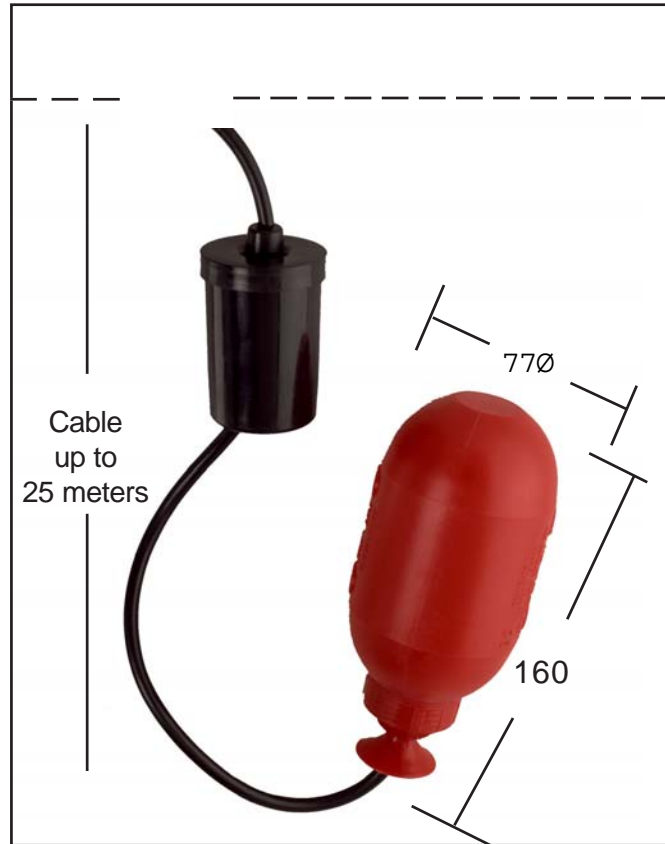

Typical installation for pump control
In most applications only 1 x A95 will be required.

PRICES

MODEL	CABLE LENGTH	PRICE
A95A	3 meters	£31.00
A95AS1	5 meters	£38.00
A95B	10 meters	£40.00
A95BS1	15 meters	£48.00
A95BS2	20 meters	£56.00
A95BS3	25 meters	£64.00

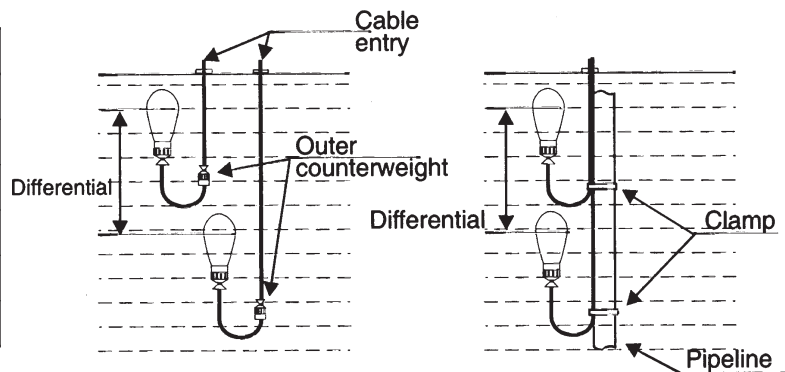

Maximum voltage	240Vac	Float material	Polypropylene
Switch rating	10A (res) 4A (Ind)	Switching differential	0.75 meter (maximum)
Maximum fluid temp	60°C	Cable material	Polyethylene
Maximum pressure	10 bar	Adjustable counter-weight	Polypropylene

PRESSURE-VACUUM-LEVEL LTD

Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,
Crowborough, East Sussex, TN6 2EG U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

Web: www.pvl.co.uk Email: info@pvl.co.uk

PVL
Switched on to Industry