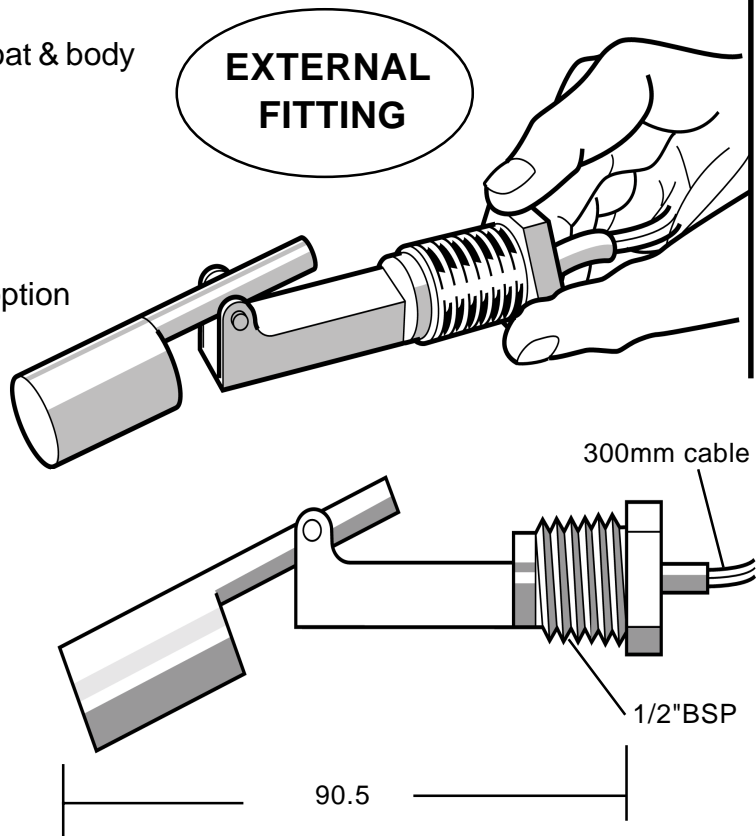


Level switch - side entry**MFS10-NI-2 & N2-2****FEATURES**

- All Nylon or all Polypropylene float & body
- 1/2" BSPT thread (1/2"NPT)
- N/O or N/C contact
- Small yet rugged construction
- Low prices & OEM discounts
- See [DataFax 1535](#) for Internal option

EXTERNAL FITTING**REED SWITCH PROTECTION**

When a reed-switch is used on an inductive load e.g. a relay - the current surge which flows back to the reed-switch (back EMF) can cause the reed switch to fail.

Fitting a suppressor either "in-line" or "across" the relay coil can help protect the reed-switch.

Call our Technical Department for details & prices.

ELECTRICAL DATA (BOTH MODELS)

Contact rating	50VA AC or DC	Contact resistance	150m Ohms
Dielectric strength	600V DC (Min)	Max switching volts	300V AC/DC
Max switching current	0.5A AC or DC	Insulation resistance	10m Ohms (Min)

Model: MFS10-N1-2 (POLYPROPYLENE)

Maximum pressure	Atmospheric	Temperature range	-10°C to + 80°C
Specific gravity	0.7	Body & float material	Polypropylene (White)

Model: MFS10-N2-2 (NYLON 6)

Maximum pressure	Atmospheric	Temperature range	-10°C to + 110°C
Specific gravity	0.7	Body & float material	Nylon 6 (Black)

PRESSURE-VACUUM-LEVEL LTD

Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,
Crowborough, East Sussex, TN6 2NQ U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

Web: www.pvl.co.uk Email: info@pvl.co.uk

PVL
Switched on to Industry