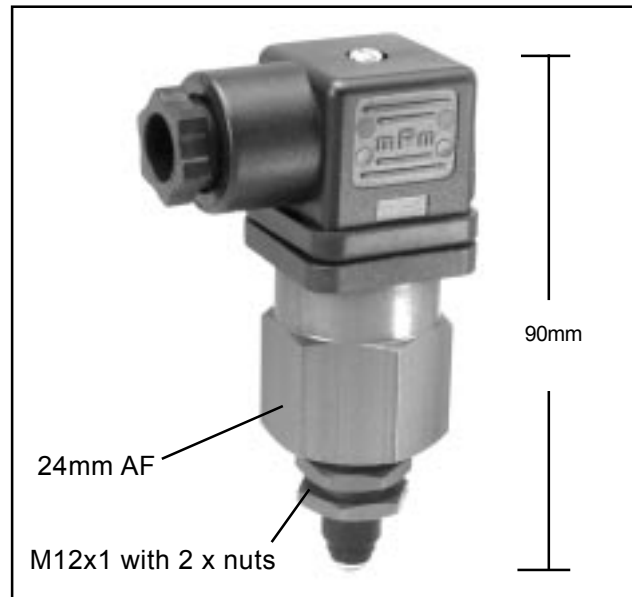


Limit switch with Din plug**FC2P****FEATURES**

- C/O contacts + earth terminal
- Protected to IP 65
- Green anodized aluminium body
- Din plug rotates
- Rugged design for heavy duty

See [DataFax 3509](#) for Model FC1P with 'push-on' (Faston) terminals.

**TECHNICAL DATA - FC2P Limit Switch**

Electrical rating	240Vac/6A (res)	Electrical connection	Screw terminals
Switch type	C/O (SPDT) + Earth	Cable gland	pg9
Operating temp.	-10°C to +80°C	Protection	IP65 with Din plug
Total travel	3 mm	Mechanical life	10 ⁶ cycles
Maximum pre-travel	0.8 mm	Electrical life @20°C	10 ⁵ cycles @ 220V/6A
Body material (24AF)	Aluminium, adodized	Max current inductive	2A
Microswitch body	Thermoplastic	Max operating force	500 gr
Operating button	Nickle plated brass	Min release force	100 gr

PRESSURE-VACUUM-LEVEL LTD

Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,
Crowborough, East Sussex, TN6 2NQ U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

Web: www.pvl.co.uk Email: info@pvl.co.uk

