


Pressure switch with Din plug**PMC & PPC****FEATURES**

- 0.15 to 300 bar adjustment ranges
- Over pressures up to 600 bar
- SPDT (C/O) Contacts
- Switch rating 250Vac/3A (res) 2A (ind)
- 1/4" BSP standard female thread
- Adjustment located under screwed cap
- Steel port with aluminium body

OPTIONS

- 2 x SPDT (C/O) Contacts

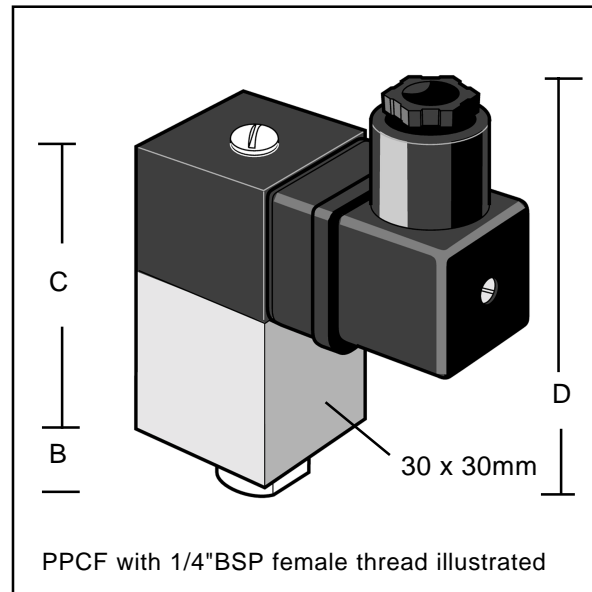

Model	Adjustment range bar	Thread	Dimensions			Tolerance @ 25degC	Maximum pressure	Diaphragm or Piston
			B	C	D			
PMC 2	0.15 - 2	1/8" BSPT (male)	10	44	75	+/- 0.1	30 bar	Diaphragm
PMC 5	0.2 - 5					+/- 0.1	60 bar	
PMC 10	0.5 - 10					+/- 0.2	100 bar	
PMC 25	10 - 25					+/- 0.5	100 bar	
PMC 80	25 - 80					+/- 0.1	150 bar	
PPC 150	30 - 150	1/4"BSPT (male)	12	46	78	+/- 7.0	600 bar	Piston
PPC 300	150 - 300					+/- 7.0	600 bar	
PPCF 150	30 - 150	1/4"BSP (female)	72			+/- 7.0	600 bar	
PPCF 300	150 - 300					+/- 7.0	600 bar	

Switch electrical rating	250Vac/3A (res) 2A (ind)	Diaphragm/Piston material	Viton (others available)
Protection	IP65 (Pg9 gland standard)	Body material (upper)	Aluminium
Pressure adjustment range	0.15 to 300 bar (7 models)	Body material (lower)	Steel (threaded port)
Maximum pressure	Up to 600 bar	Thread	1/4" BSP
Hysteresis	Fixed (25 - 30% of op press.)	Temperature range	-20 to + 90degC

PRESSURE-VACUUM-LEVEL LTD

Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,
Crowborough, East Sussex, TN6 2NQ U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

Web: www.pvl.co.uk Email: info@pvl.co.uk

