


Level switch - Top entry**RFS-2B-2 & 2C-2****FEATURES**

- Nitrile or polypropylene float
- 304 grade stainless steel stem
- Ideal for rugged applications
- 100°C maximum temperature
- N/O or N/C contact
- 1/8" BSP thread with nut
- 240Vac/50VA, 300mm cable

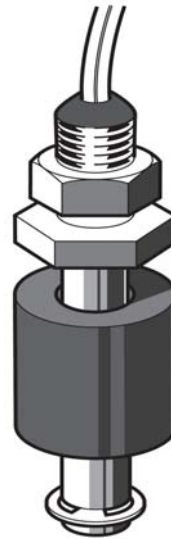

RIKO
European Distributor

RFS-2B-2
illustrated**PRICES**See our latest prices at www.epvl.co.uk

Maximum voltage	240Vac	Float material (2B-2)	Nitrile (Buna-N)
Reed switch rating	50VA	Maximum temp (2B-2)	-10 to +100°C
Maximum current	0.5A (resistive)	Float buoyancy (2B-2)	0.47SG
Stem material	304 stainless steel	Maximum pressure (2B-2)	15 bar
Float dimensions	25dia x 25mm	Float material (2C-2)	Polypropylene
Thread type	1/8" BSP x 15mm	Maximum temp (2C-2)	-10 to +80°C
Circlip material	Stainless steel	Float buoyancy (2C-2)	0.70SG
Contacts	N/O or N/C	Maximum pressure (2C-2)	3 bar

PRESSURE-VACUUM-LEVEL LTDUnit 9, Lexden Lodge Industrial Estate, Jarvis Brook,
Crowborough, East Sussex, TN6 2NQ U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

Web: www.pvl.co.uk Email: info@pvl.co.uk


PVL
Switched on to Industry