


Level switch**A95****FEATURES**

- Double sealed float switch
- Polypropylene outer casing
- Adjustable counter-weight
- Differential level control
- Heavy duty microswitch
- Ideal for water and sewage
- Suitable for acidic & alkaline liquids

OPTIONS


- 3,5,10,15,20 & 25m cable lengths
- S/Steel version - DataFax 1524
- 3/Phase switching - DataFax 1521
- Intrinsically Safe (IS) option with EA30 Galvanic Barrier - (EEXi) - please phone for details.

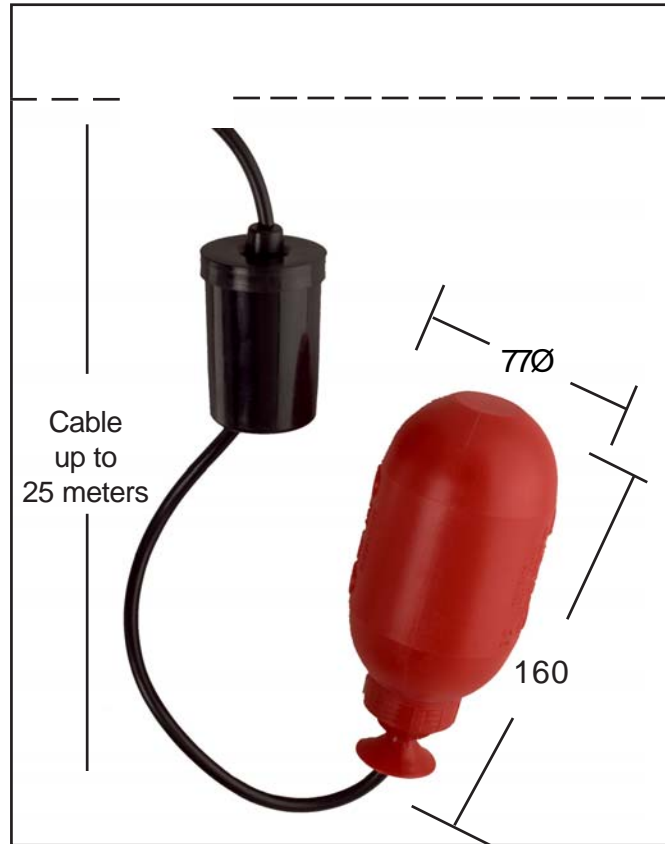

Typical installation for pump control
In most applications only 1 x A95 will be required.

PRICES

| MODEL | CABLE LENGTH |
|--------|--------------|
| A95A | 3 meters |
| A95AS1 | 5 meters |
| A95B | 10 meters |
| A95BS1 | 15 meters |
| A95BS2 | 20 meters |
| A95BS3 | 25 meters |

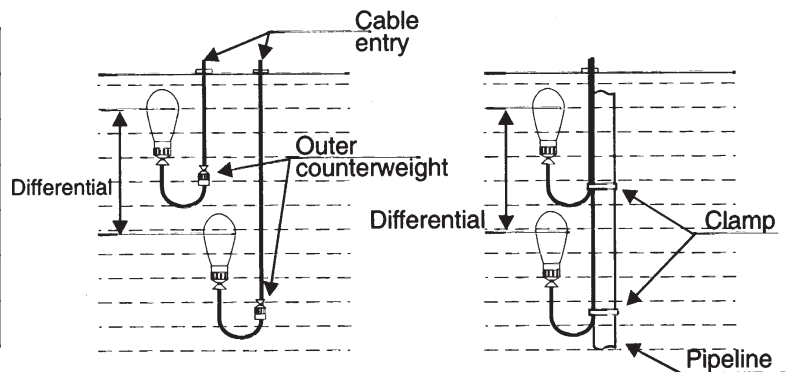

| | | | |
|--------------------|--------------------|---------------------------|----------------------|
| Maximum voltage | 240Vac | Float material | Polypropylene |
| Switch rating | 10A (res) 4A (Ind) | Switching differential | 0.75 meter (maximum) |
| Maximum fluid temp | 60°C | Cable material | Polyethylene |
| Maximum pressure | 10 bar | Adjustable counter-weight | Polypropylene |

PRESSURE-VACUUM-LEVEL LTD

Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,
Crowborough, East Sussex, TN6 2EG U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

Web: www.pvl.co.uk Email: info@pvl.co.uk

PVL
Switched on to Industry