


Float Switch - kit**'QUICK'TM**

The 'QUICK'TM Level Switch means that you can make up a level switch, any length you like up to 1m, as quickly as you can assemble it, using the selection of Tank Fittings shown below and the Brass Tubing supplied.

**CFS-3B-BRS B/HEAD
BULK HEAD
FITTING**


Supplied complete with Float Switch assembly and Stem. (Length to be advised)

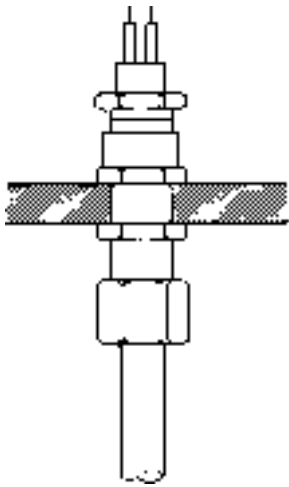

OR →

**CFS-3B-BRS 1" BSP
1" BSP SCREW
FITTING**


Supplied complete with Float Switch assembly and Stem. (Length to be advised)

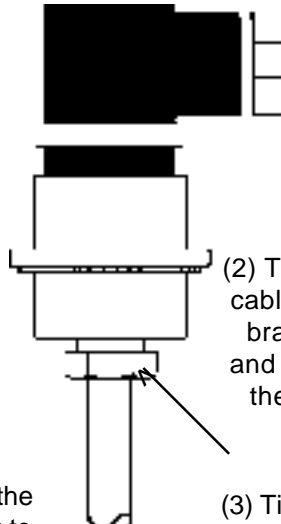

OR →

**CFS-3B-BRS FLANGE
FLANGE
FITTING**

Supplied complete with Float Switch assembly and Stem. (Length to be advised)

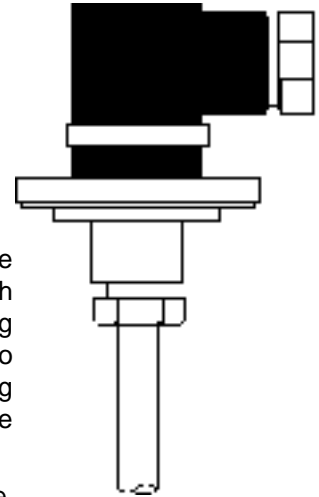

(1) Cut the tubing to length

(2) Thread the cable through brass tubing and solder to the Din plug base

(3) Tighten the compression fittings

Optional Temperature Switch

Technical details on next page....

See [DataFax 1525P](#) for prices

PRESSURE-VACUUM-LEVEL LTD


Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook, Crowborough, East Sussex, TN6 2NQ U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

Web: www.pvl.co.uk Email: info@pvl.co.uk


PVL
Switched on to Industry

Float Switch - kit **'QUICK'TM**

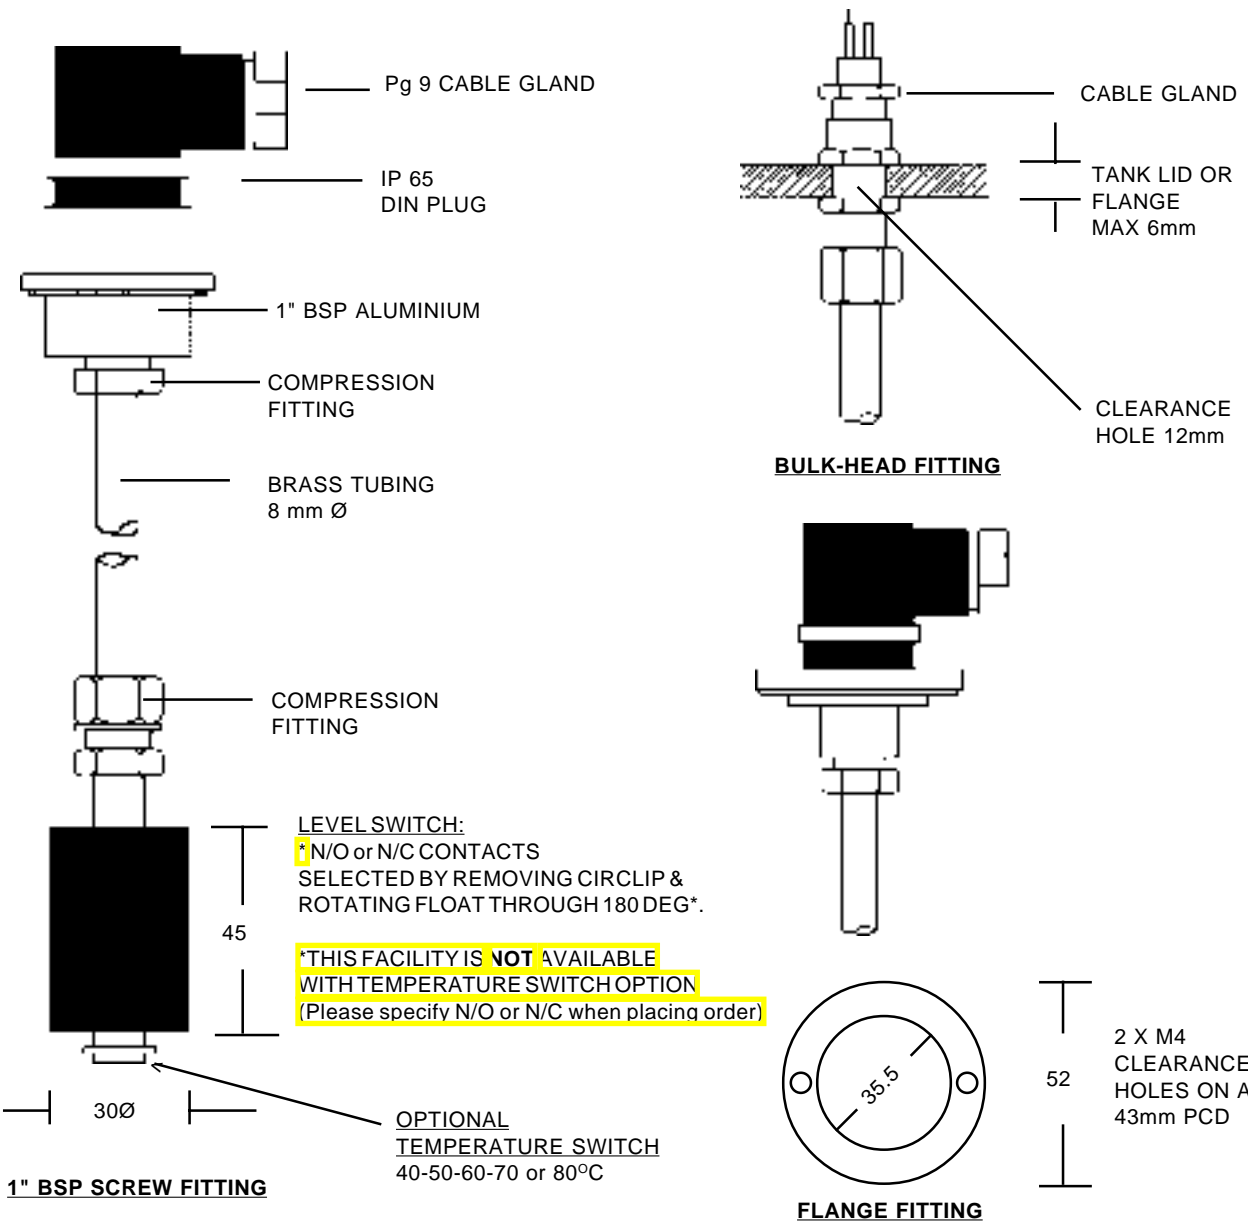

See [DataFax 1525P](#) for prices

SPECIFICATION - QUICK FLOAT SWITCH		
ELECTRICAL		MECHANICAL
Switch contacts	N/O or N/C	Operating temperature -10 to +80°C
Maximum voltage	220 Vac	Maximum pressure 10 bar
Maximum current	0.8A (resistive)	Nitrile float SG is suitable for use with oil & water.
Contact rating	60 VA	



PRESSURE-VACUUM-LEVEL LTD
 Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,
 Crowborough, East Sussex, TN6 2NQ U.K.
Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90
Web: www.pvl.co.uk Email: info@pvl.co.uk

