



Multi-level switches**CUSTOM****FEATURES**

- Up to 4 floats per assembly
- Brass or stainless steel stem
- Nitrile, s/steel or PP float
- 1" BSP standard fitting
- Other fittings optional
- IP67 terminal head

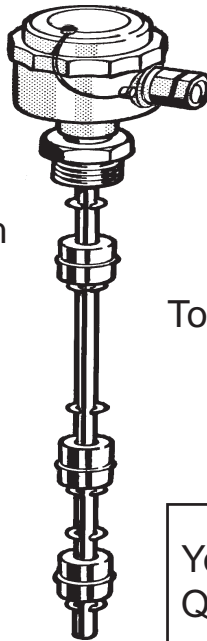

To help us process your enquiry quickly & efficiently, please advise the following information...

Your Reference =
Quantity required =

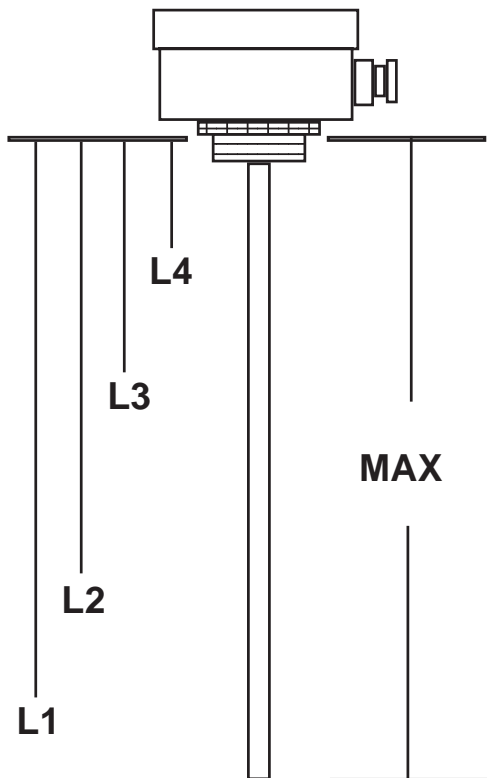

Contacts rated 240Vac/0.5A (res)
10W maximum

Material - please tick the box

All stainless steel:

Brass & Nitrile:

PVC & PP:

Liquid =

SG of liquid =

Maximum liquid temperature =

Switch orientation - Please circle your choice

L1 =	mm	Close on Rise Open on Fall	or	Open on Rise Close on Fall
L2 =	mm	Close on Rise Open on Fall	or	Open on Rise Close on Fall
L3 =	mm	Close on Rise Open on Fall	or	Open on Rise Close on Fall
L4 =	mm	Close on Rise Open on Fall	or	Open on Rise Close on Fall
Max =	mm	(We need to add 40mm to L1 to close the tube and fit a circlip)		

PRESSURE-VACUUM-LEVEL LTD

Unit 9, Lexden Lodge Industrial Estate, Jarvis Brook,
Crowborough, East Sussex, TN6 2NQ U.K.

Tel: +44(0)1892 66 44 99 Fax: +44(0)1892 66 36 90

Web: www.pvl.co.uk Email: info@pvl.co.uk

PVL
Switched on to Industry